



# Saeco Brühgruppe -brewing unit Disassembly

A clean brewing unit makes good coffee!

Written By: VauWeh





## TOOLS:


- [T10 Torx Screwdriver](#) (1)
- [PH2 screwdriver](#) (1)



## PARTS:


- [Silicone grease lebensmittelecht-](#) (1)

## Step 1 — Crema valve and outlet

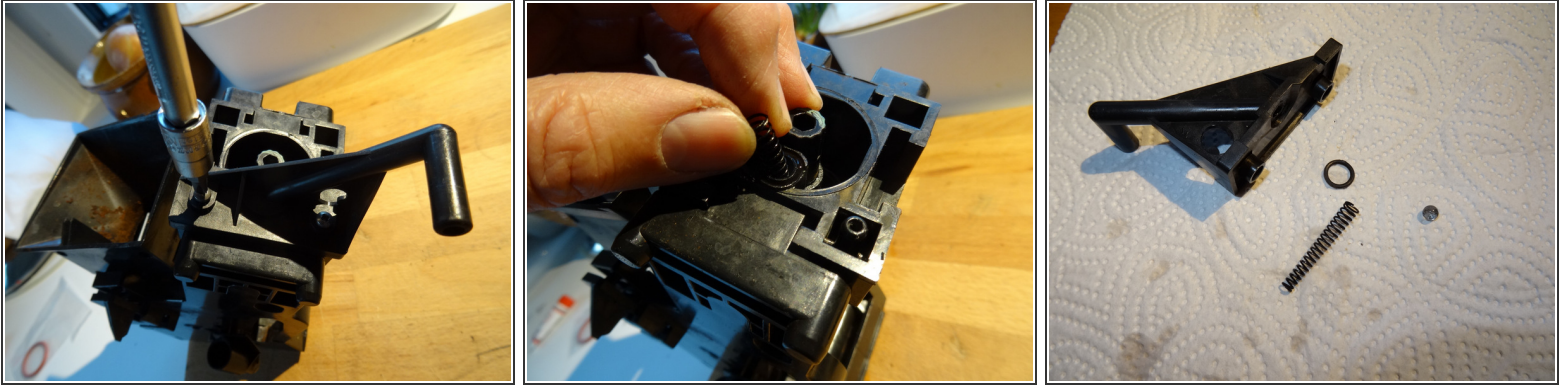

- These parts are different depending on the model in details
- Two screws hold the part, be solved. A seal is free to pick up good, replace even better later.
- Inside is a spring and a small glass ball. Store carefully.

## Step 2 — The brewing filter

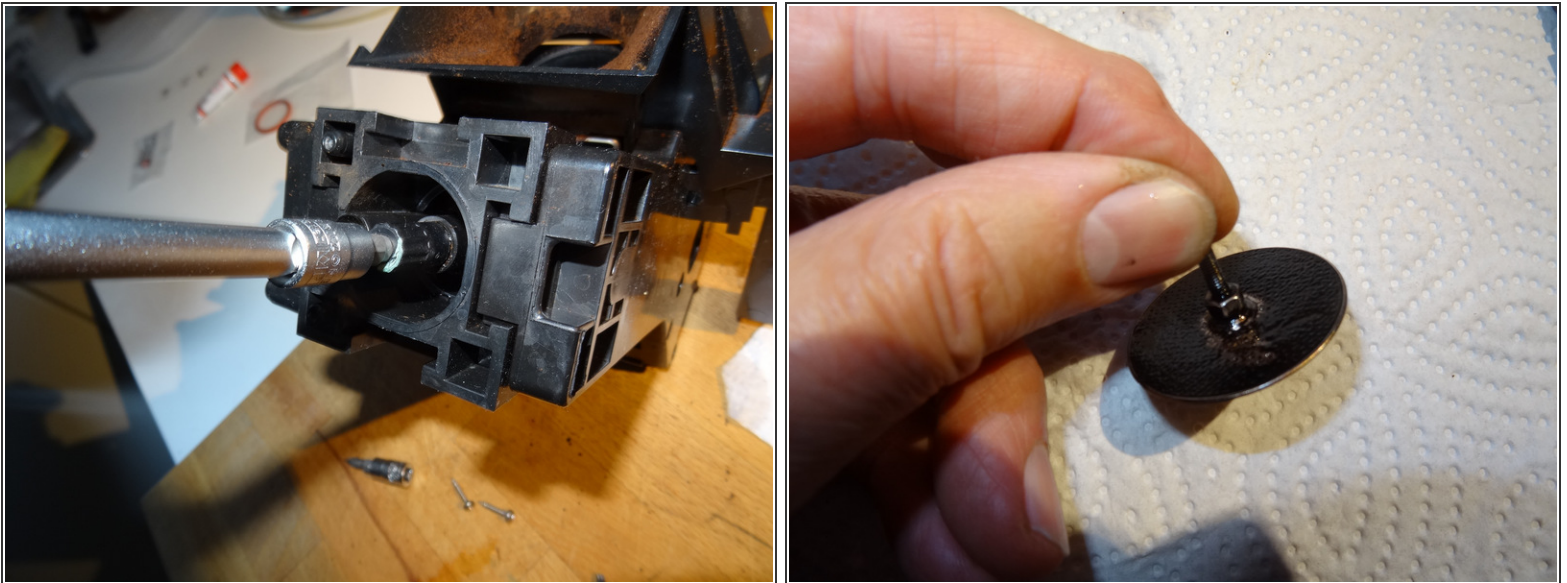

- With a 6mm allen (or the keys that came with the machine), the brew basket can be unscrewed. It strongly determines the flavor, if it is dirty taste of coffee bad.






### Step 3 — The upper piston




- He is being held by four latches. This press, eg a screwdriver, then the piston can be pushed down.
- The new seal is already waiting, previously has to be cleaned more properly but.

### Step 4 — Intake

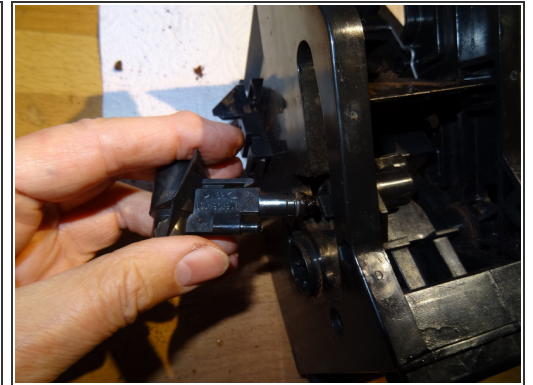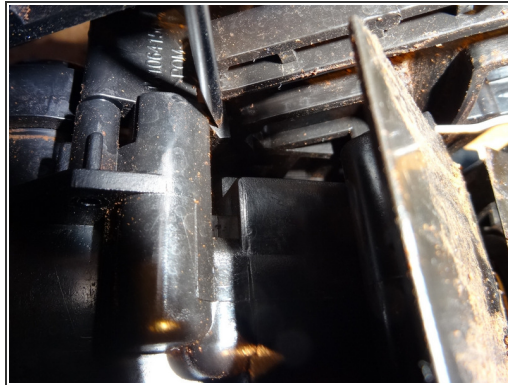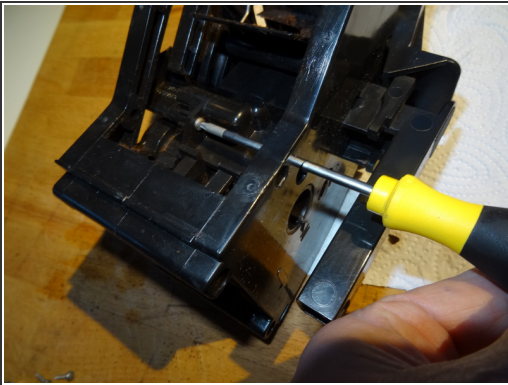


- Through the hole on the opposite side, the fastening screw can be solved. The inlet is inserted and is held by a latch that must push away.

## Step 5 — dismantle

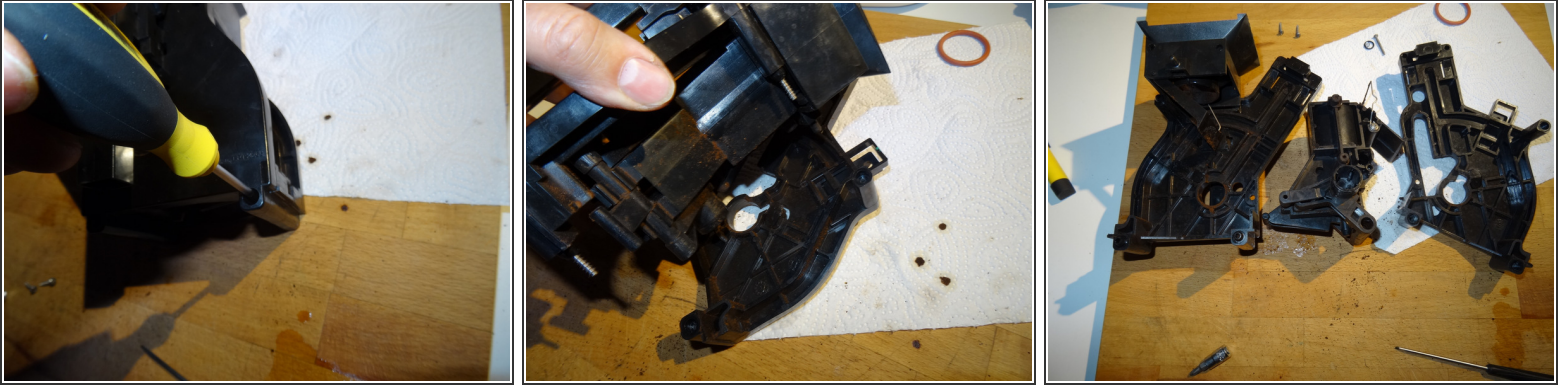

- Three screws hold together the group heads to solve.
- The entire mechanism can now be divided into three major parts. The coffee funnel may remain.


## Step 6 — lever

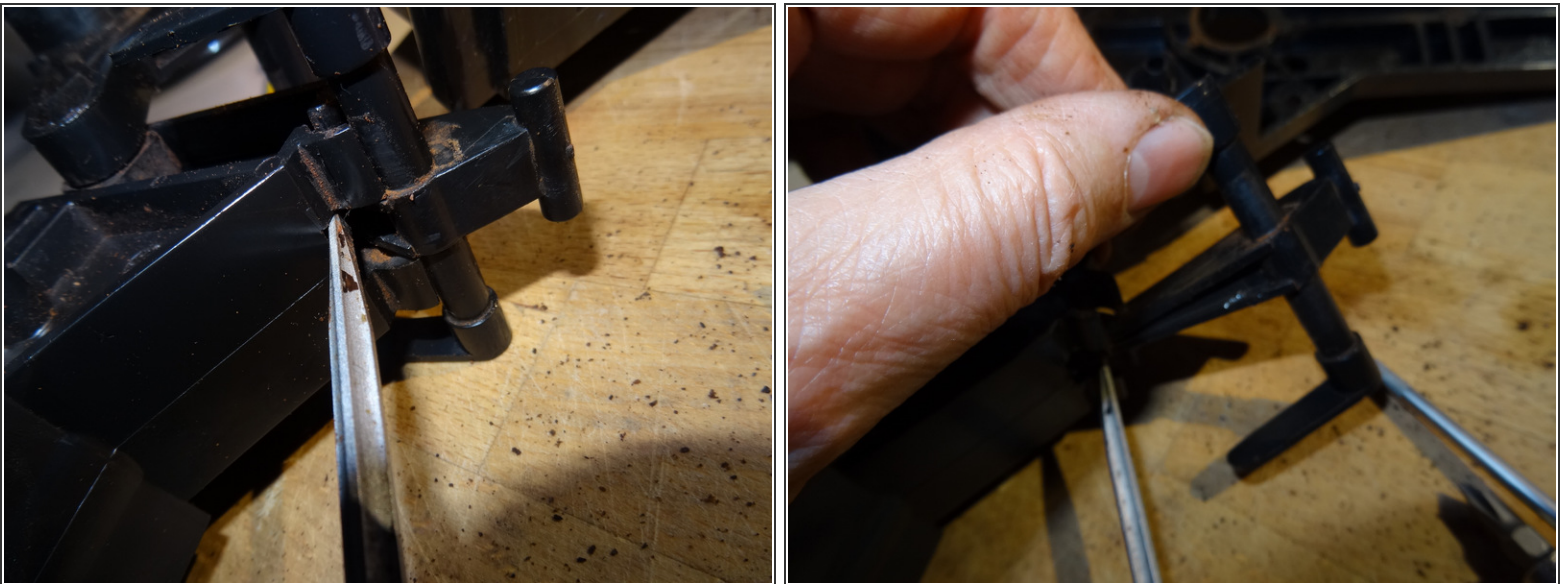

- This is the trickiest part: you have to pry this lever from his camp. For this you go with a screwdriver between lever and carrier and pushes him really vigorously outwards. Now he snapped out - hopefully!



## Step 7 — lower piston

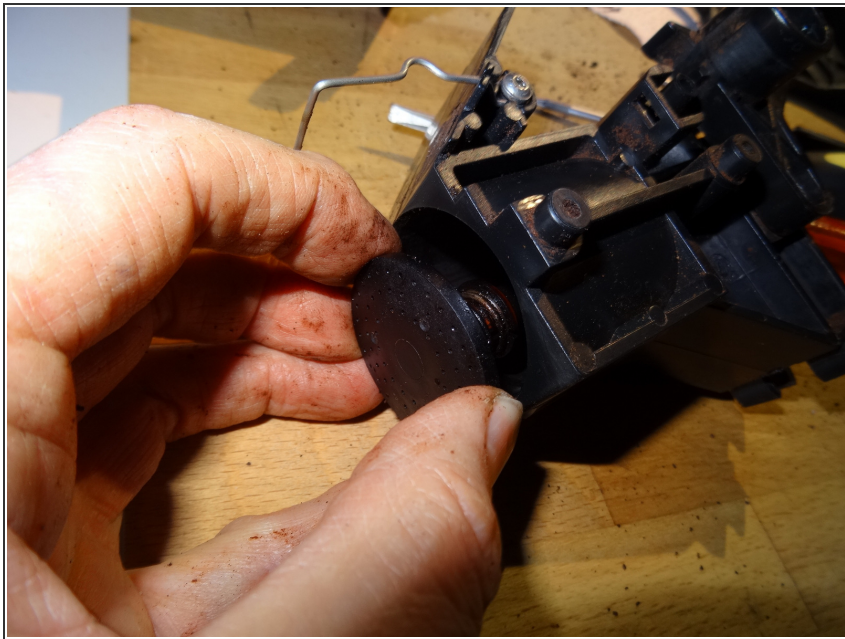

- As the lever is gone, you can easily pull out the plunger. He has no seal.

## Step 8 — Clean



- That is why we have made the whole thing. All parts are thoroughly cleaned. For this purpose, a solution of Maschinenspülmittel is good. (Use rubber gloves!) All channels with pipe cleaners clean. The brewing screen is like new again! Let it dry.
- Then in particular raise new seals on the crema valve and piston and lubricate with food-grade grease.
- Fat also belongs to the camp of the rocker arm and in the slides, the piston shaft, as well in the water inlet

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Gerät wieder zusammenzubauen.

This document was last generated on 2017-07-15 08:11:36 AM.